


# T876

# SFUCEM 10 4SN


Telephone: 01708 686600

Dorngefertigter Zementsiloschlauch geeignet zum Durchleiten von Zement, Kalk, Kies und pulverförmigen abrasiven Medien mit kleiner Teilchengröße. Geeignet auch für Tanklastwagen.


Mandrel built bulk material delivery hose suitable for abrasive materials such as cement, chalk, lime and abrasive powders with small granules. Suitable for silo discharging and on tank trucks.

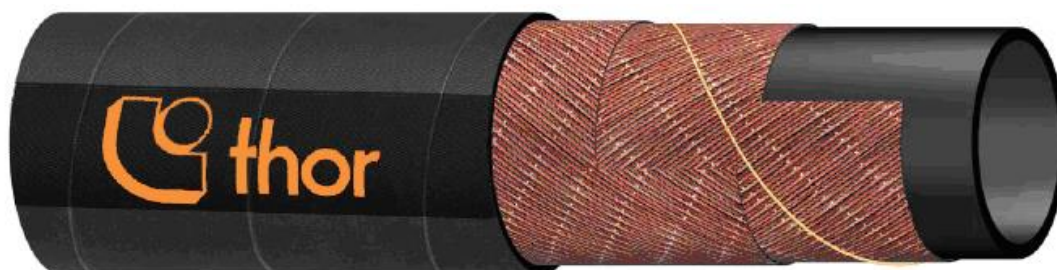

## Technische Daten

<b>Seele</b>	Schwarzes, glattes Gummi, elektrisch leitfähig und abriebfest.
<b>Einlagen</b>	Synthetische Textileinlagen und Kupferlitze
<b>Decke</b>	Schwarzes, glattes gummi, abrieb- und witterungsbeständig. Stoffgemustert.
<b>Betriebsdruck</b>	10 bar
<b>Soll-Platzdruck</b>	30 bar
<b>Temperatur</b>	-40 °C +70 °C
<b>Markierung</b>	 thor DRY MATERIAL DELIVERY HOSE WP 10 BAR – 150 PSI (in orangener Schrift)

## Technical Characteristics

<b>Tube</b>	Black smooth conductive rubber, resistant to abrasion.
<b>Reinforcement</b>	High tensile textile plies, antistatic wire
<b>Cover</b>	Black, smooth, weather and abrasion resistant rubber. Fabric impression.
<b>Working Pressure</b>	10 bar
<b>Nominal Burst Pressure</b>	30 bar
<b>Temperature</b>	-40 °C +70 °C
<b>Marking</b>	 thor DRY MATERIAL DELIVERY HOSE WP 10 BAR – 150 PSI (in orange letters)

## Abmessungen / Sizes

Innendurchmesser Inner Diameter	Wanddicke Wall Thickness	Außendurchmesser Outside Diameter	Working Pressure	Gewicht Weight
mm	mm	mm	bar	Kg/m
76	8,5	93	10	3,40
102	10	122	10	4,30
127	11,5	150	10	5,70
152	11	174	10	8,10